




RP075.2 Tandem Trolley 50mm (2") Wheel Diameter

Data Sheet



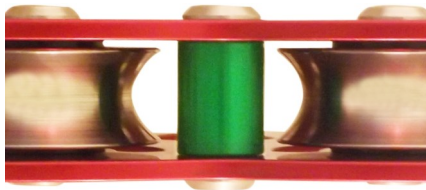


The main attachment point is large enough to accommodate a wide variety of Karabiners & Snaphooks. There are extra attachment holes for a secondary lanyard and a small central hole which can be used to fit an accessory (handle bar etc).



We offer versions for 13mm (1/2"), 16mm (5/8") or 20mm (3/4") Wire and the centre redundancy axle is fitted with a colour coded collar, for easy identification.

Colour Key

-  > 13mm (1/2") Wire
-  > 16mm (5/8") Wire
-  > 20mm (3/4") Wire

climb. work. rescue.

ISC

SOLUTIONS IN METAL

The Zipspeed Tandem Trolleys are fitted with sealed, bearings for optimum performance. The use of this specific seal means that the bearing doesn't need to be maintained or re-greased.

The Zipspeed range features, superior, heat-treated stainless steel wheels; providing greater longevity and anti-corrosion properties. All Zipspeed Tandems are machined from 7075 Aerospace grade Aluminium, to minimise flexing of the side plates.

The ISC Zipspeed Trolleys are also available with 75mm (3") Diameter wheels, to suit lines of varying tension, gradient and speeds (see RP076).

Weight	875g (31oz)
Height	111mm (4 ^{3/8} "
Width	206mm (8 ^{1/8} "
Depth	31mm (1 ^{1/4} "
Body Material	Aluminium
Finish	Anodised
Wheel Material	Stainless Steel
MBS	40kN (8992lbf)