



# RP290 Rigging Rope Wrench


## Data Sheet




The Rigging Rope Wrench has been optimised for 12-13mm (1/2") rope making it the ultimate, lightweight rigging kit, when teamed with hollow-braids.



In addition to an audible click which acknowledges the location of the locking pin, the front of the pin head is marked with an indent, which allows the user to track the orientation of the locking pin, (without having to turn the device, to look at the pin-head).

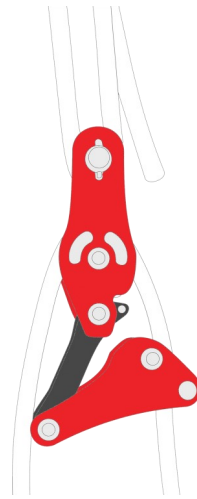

Disengaged whilst lifting load

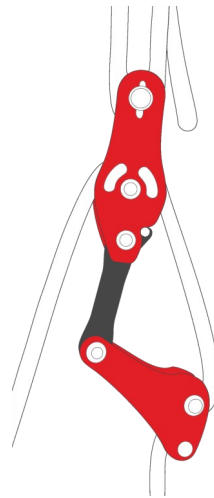


Engaged whilst lowering load



The RP290 Rigging Rope Wrench is a lowering device suitable for loads up to 70kg (154lbs).

The RP290 uses a bearing to apply friction to the lowering line whilst anchored at the top of a tree. This makes it controllable from both ground level or at height which is useful for smaller crews and on job multi-tasking.

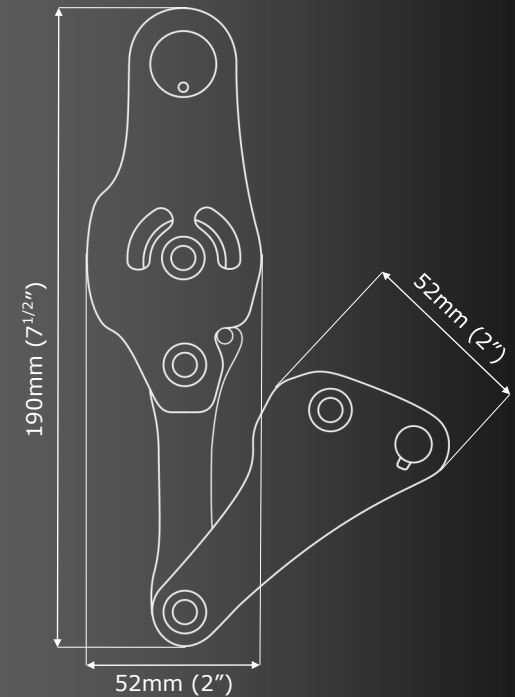

<b>Rope <math>\varnothing</math></b>	12-13mm (1/2")
<b>Unit Weight (Single Unit)</b>	475g (1lb)
<b>Packed Weight (Single Unit)</b>	727g (1.6lb)
<b>Body Material</b>	Aluminium
<b>MBS</b>	30kN (6744lbf)
<b>WLL</b>	70kg (154lbs)